

# 04 – Named Entity Recognition

## IA161 Advanced Techniques of Natural Language Processing

Z. Nevěřilová

NLP Centre, FI MU, Brno

October 9, 2019

Washington: Ben Carson said Wednesday he's pulling in lots of money amid all the backlash he's received for remarks he made regarding Muslims in politics. The retired neurosurgeon said he raised \$1 million within 24 hours following the CNN debate on Sept. 16, and that donations have poured in after remarks he made over the weekend about Islam and the presidency. "The money has been coming in so fast, it's hard to even keep up with it," he said Wednesday morning on Fox News, when asked about whether his comments had affected his donations. "I remember the day of the last debate, within 24 hours we raised \$1 million. And it's coming in at least at that rate if not quite a bit faster." CNN will not be able to verify fundraising totals with the Federal Election Commission until after the quarter ends Sept 30.

# Outline

- 1 Named Entity Recognition
- 2 Named Entity Classification
- 3 Methods for NER
  - Gazetteer Methods for NER
  - Semi-supervised methods for NER
  - Supervised methods for NER
- 4 Evaluation of NER systems

# Named Entity Recognition (NER)

NER aims to **recognize** and **classify** names of people, locations, organizations, products, artworks, domain names, phone numbers, dates, money, measurements (numbers with units), law or patent numbers etc.

# Named Entity Recognition (NER)

NER aims to **recognize** and **classify** names of people, locations, organizations, products, artworks, domain names, phone numbers, dates, money, measurements (numbers with units), law or patent numbers etc.

Named entities (NEs) can be **one word** or **multi word**.

# Named Entity Recognition (NER)

NER aims to **recognize** and **classify** names of people, locations, organizations, products, artworks, domain names, phone numbers, dates, money, measurements (numbers with units), law or patent numbers etc.

Named entities (NEs) can be **one word** or **multi word**.

[overlap with multi word expression (MWE) processing]

# Named Entity Recognition (NER)

NER aims to **recognize** and **classify** names of people, locations, organizations, products, artworks, domain names, phone numbers, dates, money, measurements (numbers with units), law or patent numbers etc.

Named entities (NEs) can be **one word** or **multi word**.

[overlap with multi word expression (MWE) processing]

## Example

	NE	MWE
Brno	✓	✗

# Named Entity Recognition (NER)

NER aims to **recognize** and **classify** names of people, locations, organizations, products, artworks, domain names, phone numbers, dates, money, measurements (numbers with units), law or patent numbers etc.

Named entities (NEs) can be **one word** or **multi word**.

[overlap with multi word expression (MWE) processing]

## Example

	NE	MWE
Brno	✓	✗
a priori	✗	✓



# Named Entity Recognition (NER)

NER aims to **recognize** and **classify** names of people, locations, organizations, products, artworks, domain names, phone numbers, dates, money, measurements (numbers with units), law or patent numbers etc.

Named entities (NEs) can be **one word** or **multi word**.

[overlap with multi word expression (MWE) processing]

## Example

	NE	MWE
Brno	✓	✗
a priori	✗	✓
New York	✓	✓

# Named Entity Recognition (NER)

NER is vital for **information extraction** (IE).

## Example

MIT Press published a book by Patrick Hanks with the title  
Lexical Analysis: Norms and Exploitations. .

MIT Press published a book by Randy Thornhill and Craig T. Palmer  
entitled A Natural History of Rape: Biological Bases of Sexual Coercion

# Named Entity Recognition (NER)

NER is vital for **information extraction** (IE).

## Example

MIT Press published a book by Patrick Hanks with the title  
Lexical Analysis: Norms and Exploitations.


MIT Press published a book by Randy Thornhill and Craig T. Palmer  
entitled A Natural History of Rape: Biological Bases of Sexual Coercion

Authors		Title
Patrick Hanks		Lexical Analysis: Norms and Exploitations
Randy Thornhill	Craig T. Palmer	A Natural History of Rape: Biological Bases of Sexual Coercion

# Named Entity Recognition (NER)

Treating the whole multiword NE as one entity can improve advanced natural language processing:


## Example

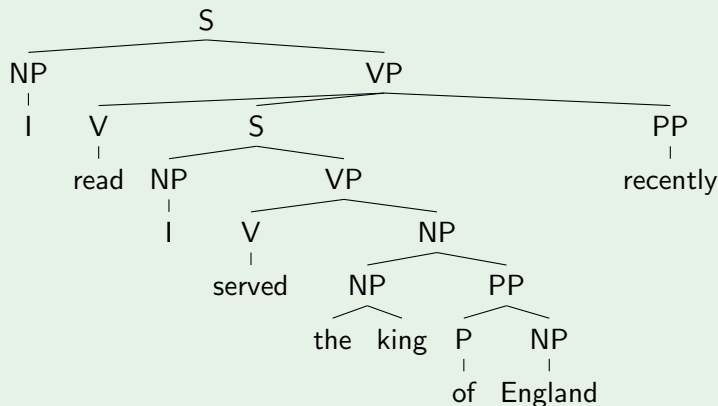

# Named Entity Recognition (NER)

Treating the whole multiword NE as one entity can improve advanced natural language processing:

## Example

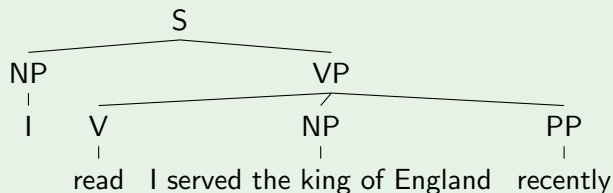

# NER: recognizing boundaries

## Example

Masaryk University in Brno

# NER: recognizing boundaries

## Example

Masaryk University in Brno

# NER: recognizing boundaries

## Example

Masaryk University in Brno



# NER: recognizing boundaries

## Example

Masaryk University in Brno

## Example

The Picture of Dorian Gray

# NER: recognizing boundaries

## Example

Masaryk University in Brno

## Example

The Picture of Dorian Gray

# NER: recognizing boundaries

## Example

Masaryk University in Brno

## Example

The Picture of Dorian Gray



Nová opera Vladimíra  
Franze Válka s mloky ...

# NER: recognizing boundaries

## Example

Masaryk University in Brno

## Example

The Picture of Dorian Gray



Nová opera Vladimíra Franze

Válka s mloky ...

# Named Entity Classification

Common classes: PERSON, ORGANIZATION, LOCATION

Less common classes: MONEY, PERCENT, DATE, TIME

Rare classes: ARTWORK, PRODUCT, ROLE

# Named Entity Classification

Common classes: PERSON, ORGANIZATION, LOCATION

Less common classes: MONEY, PERCENT, DATE, TIME

Rare classes: ARTWORK, PRODUCT, ROLE

## Example

The White House	LOCATION? ORGANIZATION
Othello	PERSON? ARTWORK? PRODUCT?
Motorola	ORGANIZATION? PRODUCT?
The Pope	PERSON? ROLE?
two years ago	DATE? nothing?

# Named Entity Classification

Common classes: PERSON, ORGANIZATION, LOCATION

Less common classes: MONEY, PERCENT, DATE, TIME

Rare classes: ARTWORK, PRODUCT, ROLE

## Example

The White House	LOCATION? ORGANIZATION
Othello	PERSON? ARTWORK? PRODUCT?
Motorola	ORGANIZATION? PRODUCT?
The Pope	PERSON? ROLE?
two years ago	DATE? nothing?

The main problem is with [metonymy](#).

# Methods for NER

- gazetteer methods (list of NEs)
- semi-supervised machine learning (bootstrapping)
- supervised machine learning (training)



# Gazetteer Methods for NER

lists of NEs + substring search algorithms:

# Gazetteer Methods for NER

lists of NEs + substring search algorithms:

- list of names
- list of company names
- list of place names

# Gazetteer Methods for NER

lists of NEs + substring search algorithms:

- list of names
- list of company names
- list of place names

search all occurrences of substrings  $S_k, \dots, S_l$  from lists of pattern strings  $P_1, \dots, P_p$  in a target string  $T[1 \dots m]$

Example algorithms:

- naïve multi-pass:  $O(p(m - n + 1))$
- improvements: Rabin-Karp, Boyer-Moore, Knuth-Morris-Pratt
- single-pass: Aho-Corasick:  $O(m + k)$

where  $p$  is the number of patterns,

$m$  is the target (searchable) string length,

$n$  is the average pattern length,

$k$  is the total number of occurrences of the pattern strings in the text

# Gazetteer Methods for NER

Problems: disambiguation + fixedness

## Example

May the force be with you!

I was born on May.

Karel May is my favorite writer.

## Example

Google was bought by Brand New So-far-unknown Company Inc.

# Semi-supervised methods for NER

bootstrapping = a small degree of supervision

## Semi-supervised methods for NER

bootstrapping = a small degree of supervision  
typically requires a small set of *seeds*

## Semi-supervised methods for NER

bootstrapping = a small degree of supervision  
typically requires a small set of *seeds*

### Example

seeds: John, James, Steve

search patterns in contexts:

Peter, David, Michael . . .

# Semi-supervised methods for NER

bootstrapping = a small degree of supervision  
typically requires a small set of *seeds*

## Example

seeds: John, James, Steve

search patterns in contexts:

Peter, David, Michael ...

## Example

[Capitalized words and letters], the CEO of  
[Capitalized words and non-capitalized stop words],

Richard Rosenblatt, the CEO of Demand Media,

Michael Close, the CEO of Enterprise Training Centre,

...




# Semi-supervised methods for NER

good for discovering NEs (fixedness problem solved)  
but not good at disambiguation

# Supervised methods for NER

manually annotated training set  
manually annotated test set (the golden standard)  
+ optionally the gazetteer


discriminative vs. generative methods



Naive Bayes




**SEQUENCE**




HMMs



**GENERAL  
GRAPHS**




Generative directed models



Logistic Regression




**SEQUENCE**



Linear-chain CRFs



**GENERAL  
GRAPHS**



General CRFs

# Supervised methods for NER: Annotation

- XML-like annotation

Zpívali jí <ne type="oa">Krásnou <ne type="pf">Meredith</ne></ne>

token	simple	IOB	IOBSE
Alex	PER	B-PER	S-PER
is	O	O	O
going	O	O	O
with	O	O	O
Marty	PER	B-PER	B-PER
A.	PER	I-PER	I-PER
Rick	PER	I-PER	E-PER
to	O	O	O
Los	LOC	B-LOC	B-LOC
Angeles	LOC	I-LOC	E-LOC

- token-based annotation

# Evaluation of NER systems

precision, recall, F1-score

# Evaluation of NER systems

precision, recall, F1-score

separate precision, recall, F1-score measurements for different classes

# Evaluation of NER systems

precision, recall, F1-score

separate precision, recall, F1-score measurements for different classes

the less difficult classes are: DATE, MONEY, PERCENT

the most difficult classes are: PERSON, ORGANIZATION

Error analysis:

- errors in boundaries detection
- errors in class labeling

What is preferred: high precision (and low recall) or high recall (and more false positives)?

... see also [9]

## Current state-of-the-art results

Language	System	F1
English	MUC-7 <sup>1</sup> , baseline	58.89%
English	MUC-7 human annotation	97.60%
English	MUC-7 best result [10]	93.39%
English	CONLL-2003 best result [3]	88.76%
English	CONLL-2003 [6]	90.10%
German	GermEval 2014 best result [5]	77.14%
German	LSTM+CRF+char-based [8]	78.76%
Russian	[4]	75.05%
Italian	tint <sup>2</sup>	82.11
Czech	[12]	82.82%
Czech	[7]	83.24%
Arabic	[1]	65.76%

<sup>1</sup>Message Understanding Conference

<sup>2</sup><http://tint.fbk.eu/ner.html>



Maha Althobaiti, Udo Kruschwitz, and Massimo Poesio.

A semi-supervised learning approach to Arabic named entity recognition.

In Galia Angelova, Kalina Bontcheva, and Ruslan Mitkov, editors, *RANLP*, pages 32–40. RANLP 2011 Organising Committee / ACL, 2013.



R. A. Baeza-Yates.

Algorithms for string searching.

*SIGIR Forum*, 23(3-4):34–58, April 1989.



Radu Florian, Abe Ittycheriah, Hongyan Jing, and Tong Zhang.

Named entity recognition through classifier combination.

In *Proceedings of the Seventh Conference on Natural Language Learning at HLT-NAACL 2003 - Volume 4*, CONLL '03, pages 168–171, Stroudsburg, PA, USA, 2003. Association for Computational Linguistics.





Rinat Gareev, Maksim Tkachenko, Valery Solovyev, Andrey Simanovsky, and Vladimir Ivanov.

Introducing baselines for Russian named entity recognition.

*In Proceedings of the 14th International Conference on Computational Linguistics and Intelligent Text Processing - Volume Part I, CICLing'13*, pages 329–342, Berlin, Heidelberg, 2013. Springer-Verlag.



Christian Hänig, Stefan Thomas, and Stefan Bordag.

Modular classifier ensemble architecture for named entity recognition on low resource systems.

2014.



Zhiheng Huang, Wei Xu, and Kai Yu.

Bidirectional LSTM-CRF models for sequence tagging.

*CoRR*, abs/1508.01991, 2015.



Michal Konkol and Miloslav Konopík.

Crf-based czech named entity recognizer and consolidation of Czech NER research.

In Ivan Habernal and Václav Matoušek, editors, *Text, Speech, and Dialogue*, volume 8082 of *Lecture Notes in Computer Science*, pages 153–160. Springer Berlin Heidelberg, 2013.



Guillaume Lample, Miguel Ballesteros, Sandeep Subramanian, Kazuya Kawakami, and Chris Dyer.

Neural architectures for named entity recognition.

*CoRR*, abs/1603.01360, 2016.



Chris Manning.

Doing named entity recognition? Don't optimize for F1.

online, accessible on <http://nlpers.blogspot.cz/2006/08/doing-named-entity-recognition-dont.html>, accessed 2015-10-08.



Andrei Mikheev, Claire Grover, and Marc Moens.  
*Description of the LTG system used for MUC-7.*  
Association for Computational Linguistics, 1998.



David Nadeau and Satoshi Sekine.  
A survey of named entity recognition and classification.  
*Linguisticae Investigationes*, 30(1):3–26, January 2007.  
Publisher: John Benjamins Publishing Company.



Jana Straková, Milan Straka, and Jan Hajič.  
A new state-of-the-art Czech named entity recognizer.  
In Ivan Habernal and Václav Matoušek, editors, *Text, Speech, and Dialogue*, volume 8082 of *Lecture Notes in Computer Science*, pages 68–75. Springer Berlin Heidelberg, 2013.



Charles Sutton and Andrew McCallum.  
An introduction to conditional random fields.  
*Foundations and Trends in Machine Learning*, 4(4):267–373, 2012.